

# Hydraulic Regulators


## Non-Relieving Regulators

1/8" FEMALE NPT, 30 - 150 PSI MAX OUTPUT, 6,000 PSI MAX INLET

Model 28RG24




Conforms to the SEP category of the European Pressure Equipment Directive  
Issue No. 97/23/EC

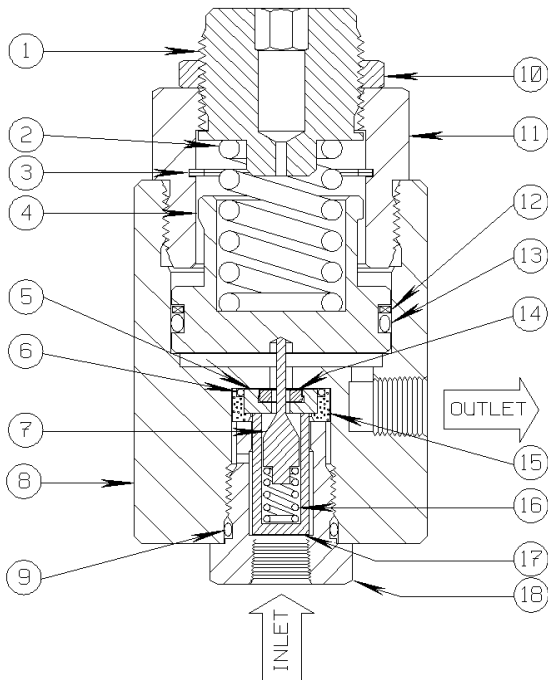

The **28RG24** is a two position, pressure reducing (spring/sensing piston modulating combination), flow control valve. Pressure Regulators are typically used to reduce source or instrument supply pressure from up to 6,000 PSI to a specific lower operating pressure, generally from 30-150 PSI. The reduced operating pressure provided from the Regulator outlet connection will be maintained within a predetermined operating pressure range or limit, required by the receiving control circuit or a control device.

Turning the Spring Adjuster clockwise will increase the Spring exerted tension to increase the Regulator output pressure. Rotating the Spring Adjuster counter-clockwise will decrease the Regulator output pressure. Once the exact operating output pressure is achieved, the Lock Nut (10) should be tightened against the Spring Housing to maintain the appropriate output pressure setting.

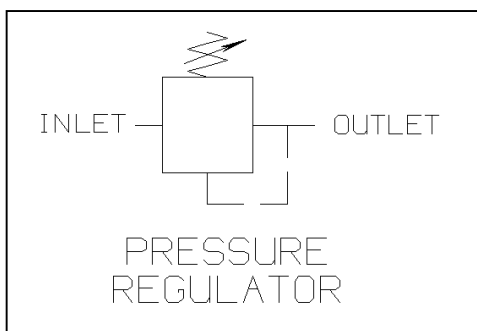

### PARTS LIST:

- |                    |                        |
|--------------------|------------------------|
| 1. Spring Adjuster | 10. Lock Nut           |
| 2. Spring *        | 11. Spring Housing     |
| 3. Spiral Ring *   | 12. Back Up Ring *     |
| 4. Sensing Piston  | 13. O Ring *           |
| 5. Kel-F Seat *    | 14. Seat Back Up *     |
| 6. O Ring *        | 15. Seat Guide *       |
| 7. Valve Pin *     | 16. Spring *           |
| 8. Valve Body      | 17. SS Porous Filter * |
| 9. O Ring *        | 18. Retainer           |

\* Indicates parts included in a Repair Kit

**Manufacturing Headquarters**  
1100 Valwood Parkway, Suite 112  
Carrollton, TX 75006

**SIGMA**  
VALVES

Tel: +1 (972) 446 8250  
Fax: +1 (972) 446 8642  
<http://www.sigmapalves.com>

# Sigma Model Number 28RG24

1/8" FEMALE NPT, 30 - 150 PSI MAX OUTPUT, 6,000 PSI MAX INLET

---

## Product Specifications

---

**Control Function:** Pressure Reducing Flow Control (High Pressure In - Low Pressure Out)

**Flow Control Application:** Normally Open

**Body Pressure Rating:** 6,000 PSI maximum (413 bar) inlet pressure

**Adjustment Range Capability (Regulated Pressure):** 30-150 PSI maximum outlet pressure

**Manual Pressure Adjusting Operator:** 360° Rotating Screw (5/16 Allen Wrench)

**Media Service:** Hydraulic, Pneumatic, Natural Gas, Nitrogen

**Connection Size (Body):** 1/8-27 Female N.P.T. Inlet and Outlet

**Orifice:** 7/64 Diameter     **Cv Factor:** .11

**Component Material (Metal):** 316 Stainless Steel and 17-4PH SS

**Seal Material:** Viton

**Panel Mount:** Yes

**Panel Hole Cutout Size Required:** 1-1/8 Diameter

**Weight:** 4 Lbs.

**Operating Temperature:** -20° F to +250° F (-29° C to +121° C)

**Overall Dimensions:** 4 Height x 2 Diameter (10.16 cm Height x 5.08 cm Diameter)

**Pressure Equipment Directive (PED):** This product conforms to the SEP Category of the European P.E.D.

### **Installation and Maintenance Instructions:**

Install by threading the pipe or fitting from the control system into the port labeled "Supply". The piping from the actuator is threaded into the port labeled "Inlet". The piping from the actuator is threaded into the port labeled "Outlet". Sigma recommends the use of appropriate thread sealant for each port connection.

### **Shelf Position Port Status**

<b><u>Inlet Supply</u></b>	High Pressure Fluid Inlet Open to Outlet
<b><u>Outlet</u></b>	Reduced Pressure Output (to receiving control circuit)

### **Repair Kit Information**

Repair Kits contain all of the Seals and other components typically replaced when repairing the assembly. In order to maintain optimum operating control function, Sigma recommends changing the Repair Kit items once every two (2) years.